




Europäisches
Patentamt

European
Patent Office

PCT/EP 00/01975 PCT
PMD 99144
Office européen
des brevets

PMD 99042

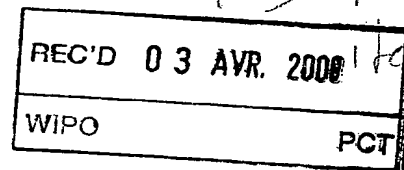

EP 00/1975
4

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

99200950.6

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Best Available Copy

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

23/02/00

THIS PAGE BLANK (USPTO)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°: 99200950.6

Anmeldetag:
Date of filing:
Date de dépôt: 26/03/99

Anmelder:
Applicant(s):
Demandeur(s):
Koninklijke Philips Electronics N.V.
5621 BA Eindhoven
NETHERLANDS

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Client-server speech recognition

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

THIS PAGE BLANK (USPTO)

Client-server speech recognition.

26. 03. 1999

(70)

The invention relates to a distributed speech recognition system for recognizing a speech input signal; the system including at least one client station and a server station; the client station including means for receiving the speech input signal from a user and means for transferring a signal representative of the received speech to the server station via a network; and the server station including means for receiving the speech equivalent signal from the network and a large/huge vocabulary speech recognizer for recognizing the received speech equivalent signal.

Such a system is known from US 5,819,220. This system discloses a client-server speech recognition system, wherein the client station is local to the user and the server is located remotely, accessible via the Internet. This system is used for providing speech input relating to a Web page. The user provides speech input to the client station which displays a Web page using a conventional browser. The speech may, for instance, be used for specifying a query or for filling information fields (e.g. name, and address) of the page. Usually, the client station receives the speech via a microphone and an A/D converter of an audio card. A representation of the speech is sent to a speech server on the Internet. This server may be located in or be accessible via a Web server which supplied the Web page. The server may also be accessible via the network at a location independent of the Web server. The server recognizes the speech. The recognition output (e.g. a recognized word sequence) may be sent back to the client station or directly to the Web server. In the known system a powerful speech recognizer can be used in the server which is capable of and optimized for recognizing speech in an Internet environment. For certain applications it will be required that this recognizer can support to a certain extent the huge vocabularies which can occur in an Internet environment where a user can access virtually any document on any topic. In the known client-server system the client station has no speech recognizer.

Since in the described system all speech input is directed to the server, the load on the server can get very high. This is particularly the case if the system supports many client stations operating at the same time.

It is an object of the invention to improve the system set forth by reducing the load on the server.

To achieve the object according to the invention, the system is characterized in that the client station includes a speech recognizer and a speech controller; the speech
5 controller being operative to direct at least part of the speech input signal to the speech recognizer and, in dependence on the outcome of the recognition, selectively directing a part of the speech input signal via the network to the server station. By incorporating also a recognizer in the client station, load can be removed from the server. The server can be targeted towards the difficult task of providing high quality recognition of huge vocabulary
10 speech for possibly many simultaneous users and be relieved from simple tasks which the local recognizers can easily fulfill. Although the tasks may be simple, they can remove a high load from the server and the network, simply by making it unnecessary to send all speech input to the server. Moreover, certain recognition task can be performed more effectively in the client than in the server, since the client can have easier access to local information
15 relevant for the recognition.

As defined in the measure of the dependent claim 2, a simple recognizer is used in the client station. In this way the additional costs and processing load on the client station can be kept low.

As defined in the measure of the dependent claim 3, the simple recognizer is
20 used to detect a spoken activation command. This relieves the central recognizer from continuously having to scan the speech input signals coming from the client stations even if the user is not speaking or if the user is speaking but does not want his/her speech to be recognized. It also relieves the network from unnecessary load.

As defined in the measure of the dependent claim 4, the simple recognizer is
25 used for performing recognition of instructions for control of the local station. The local station is best suited to determine which local operations are possible (e.g. which menu items can be controlled via voice). Moreover, it is avoided that the speech is sent via the network, and the recognition result is sent back, whereas the local station is equally or even better suited for performing the recognition task.

30 As defined in the measure of the dependent claim 5, the client station uses its local recognizer to determine to which speech server the speech signal needs to be sent. Such an approach can efficiently be used in situations where there are several speech recognition servers. An example of this is a Web page with contains several advertisement banners of different companies. Some or all of these companies may have their own speech recognition

server, for instance to allow a user to phrase spoken queries. The local recognizer/controller may perform the selection of the server and the routing of the speech based on spoken explicit routing commands, such as "select Philips", or "speak to Philips". Information used for recognizing the routing command may be extracted from the banner itself. Such information
5 may be in the banner in the form of a tag, and may include items, such as a textual and phonetic representation of the routing command. The local recognizer/controller may also determine the routing based on information associated with the respective speech server. For instance, words of the banner text may be used as the basis for the routing. For instance, if the user speaks a word which occurs in one of the banners, the speech is directed to the speech
10 server associated with that banner. If a word occurs in more than one banner, the speech may be routed to several speech servers, or to one server which was most likely (e.g. whose associated banner had the highest relative occurrence of the word). Instead of using the words which are explicitly shown in the banner, the banner may also be associated with textual information, e.g. via a link. If the user speaks one or more words from that information, the
15 speech server for the banner is selected.

As defined in the measure of the dependent claim 6, the speech recognizer in the server is used as a kind of 'backup' for those situations in which the local recognizer is not capable of recognizing the user input adequately. The decision to transfer the speech input to the server may be based on performance indications like scores or confidence measures. In this
20 way a conventional large vocabulary recognizer can be used in the client station, whereas a more powerful recognizer is used in the server. The recognizer in the server may, for instance, support a larger vocabulary or more specific language models. The local recognizer may remain operational and recognize the input, even if in parallel the input is also recognized by the server. In this way, the input of the user can still be recognized in 'real time'. The initial
25 recognition of the local recognizer with a possibly lower accuracy can then be replaced by a possibly higher quality result of the server. A selector makes the final choice between the recognition result of the local recognizer and the remote recognizer. This selection may be based on the performance indicators.

30 These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments shown in the drawings.

Figure 1 shows the elements of a typical speech recognizer;

Figure 2 illustrates HMM-based word models;

Figure 3 shows a block diagram of a distributed speech recognition system according to the invention and

Figure 4 shows a block diagram of a system with a choice of server stations.

5

Speech recognition systems, such as large vocabulary continuous speech recognition systems, typically use a collection of recognition models to recognize an input pattern. For instance, an acoustic model and a vocabulary may be used to recognize words and a language model may be used to improve the basic recognition result. Figure 1 illustrates a typical structure of a large vocabulary continuous speech recognition system 100 [refer

10 L.Rabiner, B-H. Juang, "Fundamentals of speech recognition", Prentice Hall 1993, pages 434 to 454]. The system 100 comprises a spectral analysis subsystem 110 and a unit matching subsystem 120. In the spectral analysis subsystem 110 the speech input signal (SIS) is spectrally and/or temporally analyzed to calculate a representative vector of features

15 (observation vector, OV). Typically, the speech signal is digitized (e.g. sampled at a rate of 6.67 kHz.) and pre-processed, for instance by applying pre-emphasis. Consecutive samples are grouped (blocked) into frames, corresponding to, for instance, 32 msec. of speech signal. Successive frames partially overlap, for instance, 16 msec. Often the Linear Predictive Coding (LPC) spectral analysis method is used to calculate for each frame a representative vector of

20 features (observation vector). The feature vector may, for instance, have 24, 32 or 63 components. The standard approach to large vocabulary continuous speech recognition is to assume a probabilistic model of speech production, whereby a specified word sequence $W = w_1 w_2 w_3 \dots w_q$ produces a sequence of acoustic observation vectors $Y = y_1 y_2 y_3 \dots y_T$. The recognition error can be statistically minimized by determining the sequence of words

25 $w_1 w_2 w_3 \dots w_q$ which most probably caused the observed sequence of observation vectors $y_1 y_2 y_3 \dots y_T$ (over time $t=1, \dots, T$), where the observation vectors are the outcome of the spectral analysis subsystem 110. This results in determining the maximum a posteriori probability:

$$\max P(W|Y), \text{ for all possible word sequences } W$$

By applying Bayes' theorem on conditional probabilities, $P(W|Y)$ is given by:

30

$$P(W|Y) = P(Y|W).P(W)/P(Y)$$

Since $P(Y)$ is independent of W , the most probable word sequence is given by:

$$\arg \max P(Y | W).P(W) \text{ for all possible word sequences } W \quad (1)$$

In the unit matching subsystem 120, an acoustic model provides the first term of equation (1). The acoustic model is used to estimate the probability $P(Y|W)$ of a sequence

of observation vectors Y for a given word string W . For a large vocabulary system, this is usually performed by matching the observation vectors against an inventory of speech recognition units. A speech recognition unit is represented by a sequence of acoustic references. Various forms of speech recognition units may be used. As an example, a whole word or even a group of words may be represented by one speech recognition unit. A word model (WM) provides for each word of a given vocabulary a transcription in a sequence of acoustic references. In most small-vocabulary speech recognition systems, a whole word is represented by a speech recognition unit, in which case a direct relationship exists between the word model and the speech recognition unit. In other small vocabulary systems, for instance used for recognizing a relatively large number of words (e.g. several hundreds), or in large vocabulary systems, use can be made of linguistically based sub-word units, such as phones, diphones or syllables, as well as derivative units, such as fenenes and fenones. For such systems, a word model is given by a lexicon 134, describing the sequence of sub-word units relating to a word of the vocabulary, and the sub-word models 132, describing sequences of acoustic references of the involved speech recognition unit. A word model composer 136 composes the word model based on the subword model 132 and the lexicon 134.

Figure 2A illustrates a word model 200 for a system based on whole-word speech recognition units, where the speech recognition unit of the shown word is modeled using a sequence of ten acoustic references (201 to 210). Figure 2B illustrates a word model 220 for a system based on sub-word units, where the shown word is modeled by a sequence of three sub-word models (250, 260 and 270), each with a sequence of four acoustic references (251, 252, 253, 254; 261 to 264; 271 to 274). The word models shown in Fig. 2 are based on Hidden Markov Models (HMMs), which are widely used to stochastically model speech signals. Using this model, each recognition unit (word model or subword model) is typically characterized by an HMM, whose parameters are estimated from a training set of data. For large vocabulary speech recognition systems usually a limited set of, for instance 40, sub-word units is used, since it would require a lot of training data to adequately train an HMM for larger units. An HMM state corresponds to an acoustic reference. Various techniques are known for modeling a reference, including discrete or continuous probability densities. Each sequence of acoustic references which relate to one specific utterance is also referred as an acoustic transcription of the utterance. It will be appreciated that if other recognition techniques than HMMs are used, details of the acoustic transcription will be different.

A word level matching system 130 of Fig. 1 matches the observation vectors against all sequences of speech recognition units and provides the likelihoods of a match

between the vector and a sequence. If sub-word units are used, constraints can be placed on the matching by using the lexicon 134 to limit the possible sequence of sub-word units to sequences in the lexicon 134. This reduces the outcome to possible sequences of words.

Furthermore a sentence level matching system 140 may be used which, based
5 on a language model (LM), places further constraints on the matching so that the paths investigated are those corresponding to word sequences which are proper sequences as specified by the language model. As such the language model provides the second term $P(W)$ of equation (1). Combining the results of the acoustic model with those of the language model, results in an outcome of the unit matching subsystem 120 which is a recognized sentence (RS)
10 152. The language model used in pattern recognition may include syntactical and/or semantical constraints 142 of the language and the recognition task. A language model based on syntactical constraints is usually referred to as a grammar 144. The grammar 144 used by the language model provides the probability of a word sequence $W = w_1 w_2 w_3 \dots w_q$, which in principle is given by:

15
$$P(W) = P(w_1)P(w_2|w_1).P(w_3|w_1 w_2) \dots P(w_q|w_1 w_2 w_3 \dots w_q).$$

Since in practice it is infeasible to reliably estimate the conditional word probabilities for all words and all sequence lengths in a given language, N-gram word models are widely used. In an N-gram model, the term $P(w_j|w_1 w_2 w_3 \dots w_{j-1})$ is approximated by $P(w_j|w_{j-N+1} \dots w_{j-1})$. In practice, bigrams or trigrams are used. In a trigram, the term $P(w_j|w_1 w_2 w_3 \dots w_{j-1})$ is
20 approximated by $P(w_j|w_{j-2} w_{j-1})$.

Figure 3 shows a block diagram of a distributed speech recognition system 300 according to the invention. Examples of the working of the system will be described in particular for an application wherein recognized speech is converted to a textual or similar representation. Such a textual representation may be used for dictation purposes, where the
25 textual representation is entered in a document, e.g. in word processor, or in a textual field, e.g. for specifying a field in a database. For dictation, current large vocabulary recognizers support an active vocabulary and lexicon of up to 60,000 words. It is difficult to obtain sufficient relevant data to build models capable of sufficiently accurate recognition for a much larger number of words. Typically, a user may add a certain number of words to the active
30 vocabulary/lexicon. Those words can be retrieved from a background vocabulary of 300,000 to 500,000 words (which also contains an acoustic transcription of the words). For dictation or similar purposes a huge vocabulary may, for instance, consist of at least 100,000 active words or even over 300,000 active words. It will be appreciated that particularly for an Internet environment where by a click on a link an entirely different context may be created it is

preferred that many of the words of the background vocabulary can be actively recognized. For other recognition tasks, such as recognizing names, which are usually modeled as a flat list with some form of prior name probability attached to it, but for which no high quality language model exists, a vocabulary of over 50,000 words can already be classified as huge.

5 It will be understood that the recognition outcome need not be used for dictation purposes. It may equally well be used as input for other systems, such as dialogue systems, wherein depending on the recognized speech information is retrieved from a database or an operation is effected, like ordering a book or reserving a journey.

10 The distributed recognition system 300 comprises a server station 310 and at least one client station. Shown are three client stations 320, 330 and 340, where further details are only shown for client station 330. The stations may be implemented using conventional computer technology. For instance, the client station 330 may be formed by a desk-top personal computer or workstation, whereas the server station 310 may be formed by a PC server or workstation server. The computers are operated under control of a suitable program
15 loaded in the processor of the computer. The server station 310 and the client stations 320, 330, and 340 are connected via a network 350. The network 350 may be any suitable network, such as a local area network, for instance in an office environment, or a wide area network, preferably Internet. The stations comprise communication means 312 and 332, respectively, for communicating via the network 350. Any communication means suitable for use in
20 combination with the network 350 may be used. Typically, the communication means are formed by a combination of hardware, such as a communication interface or a modem, and software in the form of a software driver supporting a specific communication protocol, such as Internet's TCP/IP protocols. The client station 330 comprises means for receiving speech from a user, for instance via an interface 331. The client station 330 further comprises means
25 for pre-processing the speech signal, making it suitable for transfer to the server station 310. For instance, the client station may comprise a spectral analysis subsystem 333 similar to the spectral analysis subsystem 110 of Fig.1. The server station 310 is capable of performing all other tasks as described for system 100 of Fig.1. Preferably, the server station is capable of large or huge vocabulary continuous speech recognition. In itself large vocabulary speech
30 recognition is well-known. For huge vocabulary speech recognition preferably the technique described in the co-pending application PHD 99039 of the same applicant is used. The server station 310 comprises a recognizer 312 which may be similar to the unit matching subsystem of Fig.1, using a word model and a language model. The recognition output, such as a sequence of recognized words RS, may be transmitted back to the client station 330. It may

also be used in the server station 310 for further processing (e.g. in a dialogue system), or be transferred to a further station, like a service provider on Internet. According to the invention, the client station 330 includes a speech recognizer 334. In a preferred embodiment, the speech recognizer 334 of the client station 330 is a limited speech recognizer, such as a small
5 vocabulary or keyword recognizer. Such recognizers are well-known and can be implemented cost-effectively. The client station 330 further includes a speech controller 335. The speech controller 335 analyzes the outcome of the recognition by the local recognizer 334 and, in dependence on the outcome of the recognition, selectively directs a part of the speech input signal via the network 350 to the server station 310. To this end, the client station 330 includes
10 a controllable switch 336 which determines whether or not the speech input received via the interface 331 (and analyzed by the analyzer 333) is sent by means of the communication interface 332 to the server station 310. Depending on the task of the local recognizer 334 and the load which may be put on the client station 330, the speech controller 335 may use a further switch to only transfer part of the speech input signal to the local speech recognizer
15 334. For instance, the client station 330 may include a speech activity detector which, for instance based on the energy level of the received input signal, determines whether or not the user might be speaking. If the user is not speaking (the level is below a threshold), the signal need not be directed to the local recognizer 334. Such activity detectors are known. If the load is not a limiting factor, it is preferred to always direct the speech to the local recognizer, at
20 least when the user has activated the involved programs and as such has indicated a wish to sometime start a recognition session. By always having the local recognizer active, defects of the energy-based activity detectors can be avoided. For instance, it is very difficult to achieve an accurate setting of a threshold for such a detector, particularly in a noisy environment, e.g. with background music or people speaking in the background.

25 In a preferred embodiment, the speech recognizer 334 is a limited speech recognizer operative to recognize a spoken command for activating recognition by the server station. If such a predetermined command (or one of a number of predetermined activation commands) has been recognized, the speech controller 335 controls the switch 336 to direct the speech input signal to the server station 310. The speech controller 335 also sends an
30 activation instruction to the server station 310 via the communication means 332. This activation instruction may be implicit. For instance, recognition in the server 310 may automatically be activated whenever speech is received via the communication interface 312.

In an alternative embodiment, the recognizer 334 is operative to recognize at least one spoken command/control instruction relating to the operation of the local client

station 330. For this task it is sufficient to use a small vocabulary or keyword recognizer. In response to recognizing a local command/control instruction, the speech controller 335 issues a corresponding machine control instruction to a station controller 337 of the local client station 330. Such a machine instruction may be an operating system or user interface instruction as, for instance, defined for the Windows operating system. The speech controller 335 as well as the station controller 337 may be tasks under Windows.

In an alternative embodiment, as shown in Figure 4, the system 400 includes a plurality of server stations, shown are 410, 420 and 430. The server stations may be of similar construction as described for server station 310 of Fig.3. The server stations are connected via a network 440 to at least one client station, shown is client station 450. The client station 450 may be of a same construction as described for station 330 of Fig.3. The speech recognizer of the client station 450 is, preferably, a limited speech recognizer. The speech recognizer is operative to recognize speech routing commands. The speech controller of the client station selectively directs the speech input signal to at least one server associated with the recognized routing command. The directing may be based on a table for translating a speech routing command to a network address of a server station. Such a table may be predetermined, e.g. once loaded into the client station or entered by the user of the client station. Alternatively, such a table may be dynamic. For instance, the table may be embedded in or associated with a document, such an HTML document, downloaded via Internet. In such a document, different areas may be associated with different respective servers. For instance, a document may include several advertisement banners, each associated with its own recognition server.

In an alternative embodiment, the speech recognizer 334 of the client station 330 of Fig.3 is a large vocabulary speech recognizer (or optionally a huge vocabulary speech recognizer). The speech controller 335 directs part (or all) of the speech input signal to the server station 310 if a performance indicator for a recognition result of the speech recognizer 334 in the local client station 330 is below a predetermined threshold. The directing may be effected by changing the switch 336. In principle it may be sufficient to only route the last part of the speech signal to the server station 310, e.g. only the part relating to a badly recognized sentence. It may be preferred to route also earlier speech material to the server station 310, allowing the server station to better synchronize with the speech signal and, optionally, choose suitable recognition models, such as acoustic or language models based on the earlier part of the signal. The server station 310 transfers a recognized word sequence back to the client station 330. The client station 330 including a selector for selecting a recognized word sequence from the word sequences respectively recognized by the recognizer in the client

station and recognizer in the server station. In practice the task of the selector will be combined with the task of the speech controller 335, which anyhow already analyzes the results of the local recognition.

CLAIMS:

EPO - DG 1

26. 03. 1999

(70)

1. A distributed speech recognition system for recognizing a speech input signal;
the system including at least one client station and a server station;

the client station including means for receiving the speech input signal from a
user and means for transferring a signal representative of the received speech to the server
5 station via a network; and

the server station including means for receiving the speech equivalent signal
from the network and a large/huge vocabulary speech recognizer for recognizing the received
speech equivalent signal;

characterized in that the client station includes a speech recognizer and a speech controller; the
10 speech controller being operative to direct at least part of the speech input signal to the speech
recognizer and, in dependence on the outcome of the recognition, selectively directing a part
of the speech input signal via the network to the server station.

2. The system as claimed in claim 1, wherein the speech recognizer of the client
15 station is a limited speech recognizer, such as a small vocabulary or keyword recognizer.

3. The system as claimed in claim 2, wherein the limited speech recognizer is
operative to recognize a spoken command for activating recognition by the server station; and
wherein the speech controller is operative to send, in response to recognizing an activation
20 command, an activation instruction to the server and to direct the speech input signal to the
server station.

4. The system as claimed in claim 2, wherein the limited recognizer is operative to
recognize at least one spoken command/control instruction relating to the operation of the
25 local client station and the speech controller is operative to issue a machine control instruction
corresponding to the recognized command/control instruction to a station controller of the
local client station.

5. The system as claimed in claim 2, characterized in that the system includes a plurality of server stations; the limited speech recognizer being operative to recognize speech routing commands; the speech controller being operative to selectively direct the speech input signal to at least one associated server.

5

6. The system as claimed in claim 1, wherein the speech recognizer of the client station is a large vocabulary speech recognizer; the speech controller being operative to direct at least a part of the speech input signal to the server station if a performance indicator for a recognition result of the speech recognizer in the local client station is below a predetermined threshold;

10

the server station being operative to transfer a recognized word sequence back to the client station;

the client station including a selector for selecting a recognized word sequence from the word sequences respectively recognized by the recognizer in the client station and

15

recognizer in the server station.

ABSTRACT:

26. 03. 1999

(70)

A distributed speech recognition system 300 includes at least one client station 330 and a server station 310 connected via a network 350, such as Internet. The client station 330 includes means 331 for receiving the speech input signal from a user. A speech controller 335 directs at least part of the speech input signal to a local speech recognizer 334. The, preferably limited, speech recognizer 334 is capable of recognizing at least part of the speech input, for instance a spoken command for starting full recognition. In dependence on the outcome of the recognition, the speech controller 335 selectively directs a part of the speech input signal via the network 350 to the server station 310. The server station 310 includes means 312 for receiving the speech equivalent signal from the network and a large/huge vocabulary speech recognizer 314 for recognizing the received speech equivalent signal.

Fig. 3

THIS PAGE BLANK (USPTO)

EPO - DG 1

1/2

26. 03. 1999

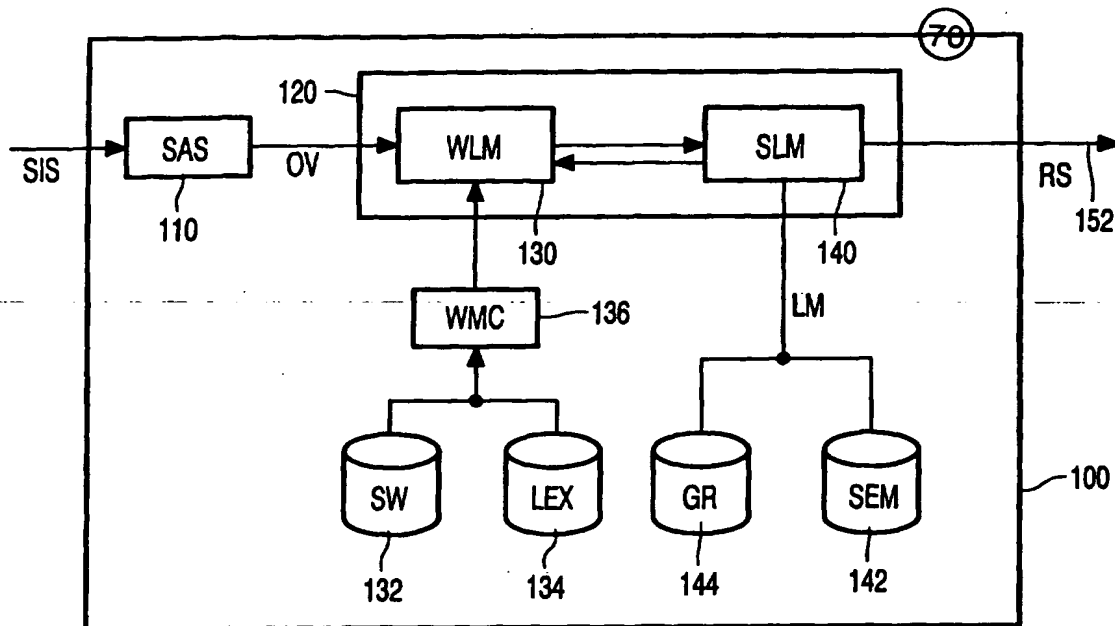


FIG. 1

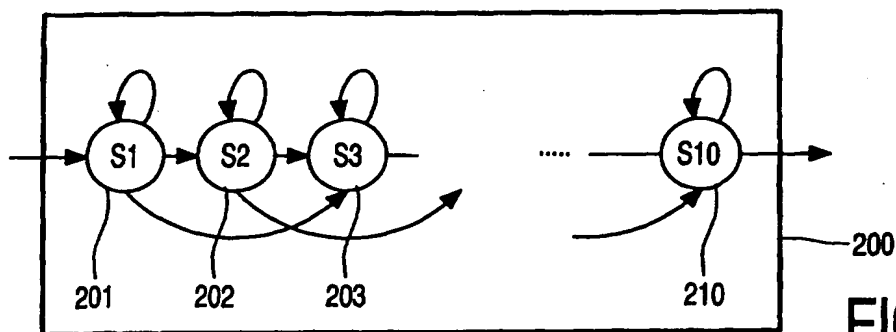


FIG. 2a

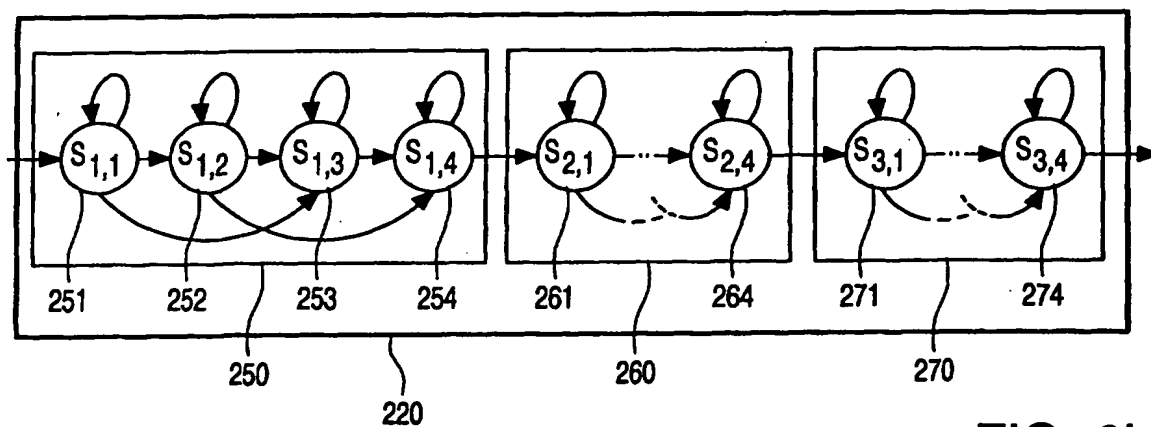


FIG. 2b

2/2

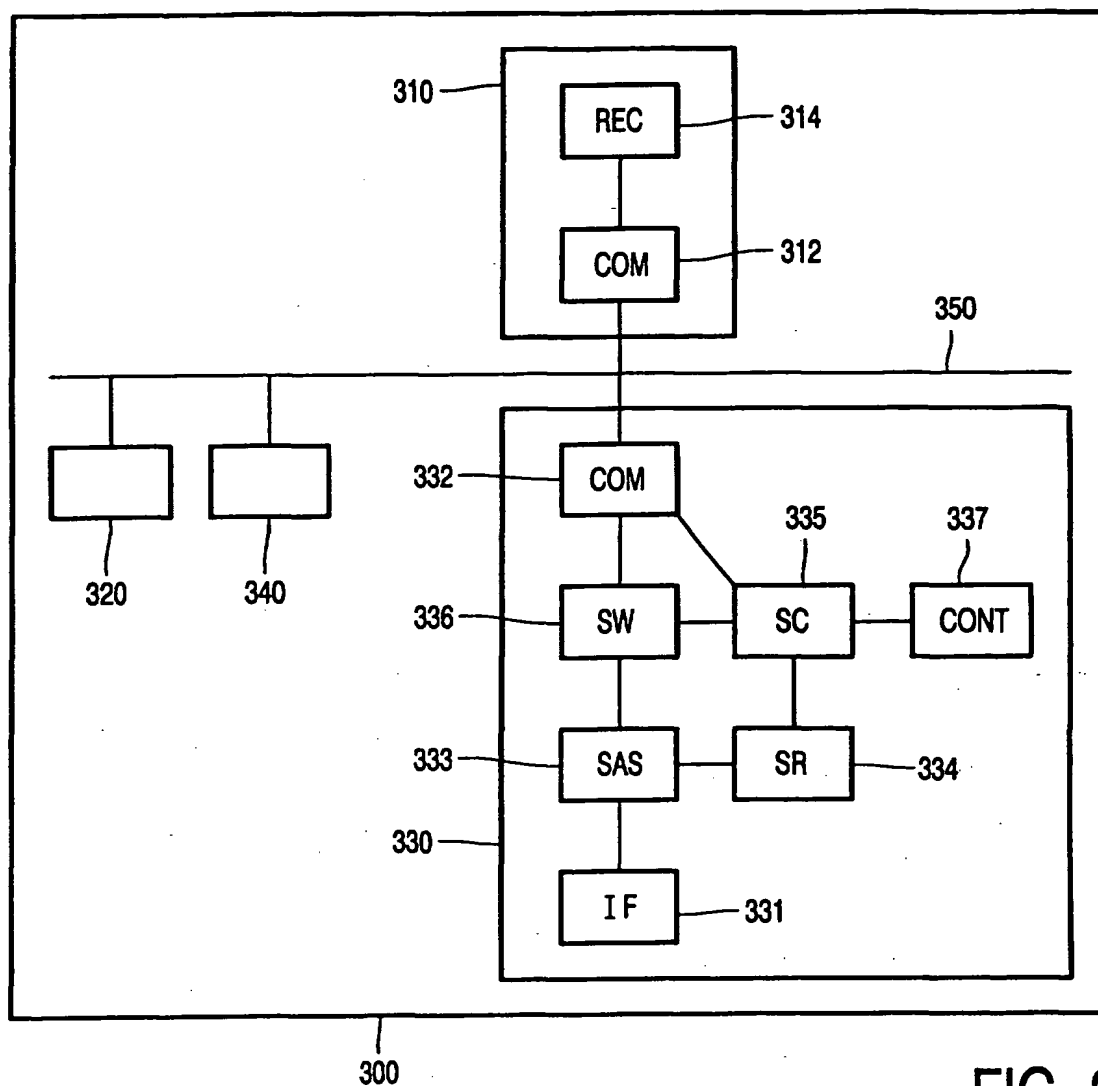


FIG. 3

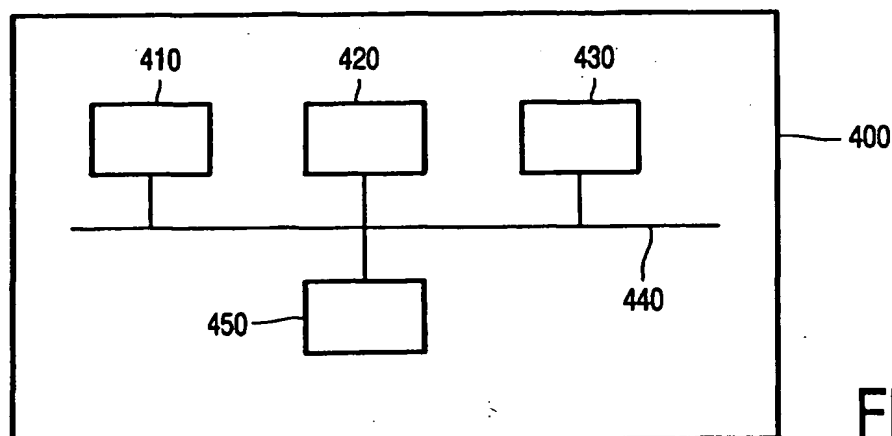


FIG. 4

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINE(S) OR MARK(S) ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)